

JEFF MADISON

AND THE
SIEGE OF BYLLERAZ • BOOK V




Step 1: Align the password and open Cryptex



Step 2: Screw out the small screws using Allen key



Step 3: Disassemble the cryptex

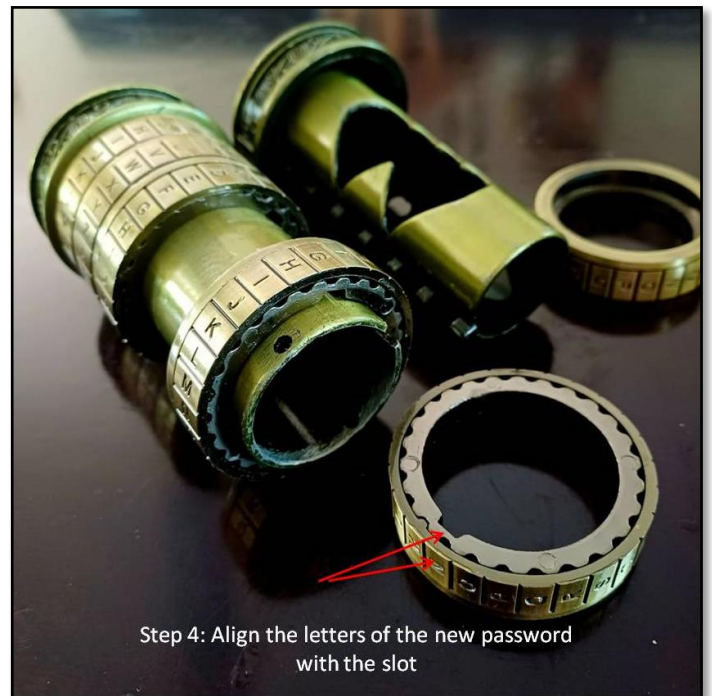

Step 4: Align the letters of the new password with the slot



Step 5: Reassemble